





# AX3000 Wi-Fi 6 Range Extender


Boost your Wi-Fi




RE715X

 Wi-Fi 6  
Dead-Zone Killer

 160  
MHz  
↑↑↑  
Wider  
Channel Width

 Connect  
More Devices<sup>Δ</sup>


 Uninterrupted  
Streaming<sup>§</sup>

 Easy Setup  
Within Minutes

# Highlights

## Extend AX3000 Wi-Fi to Your Whole Home

Works with any Wi-Fi router to eliminate Wi-Fi dead zones, and blanket your home with stable, super-fast, seamless Wi-Fi via OneMesh™.

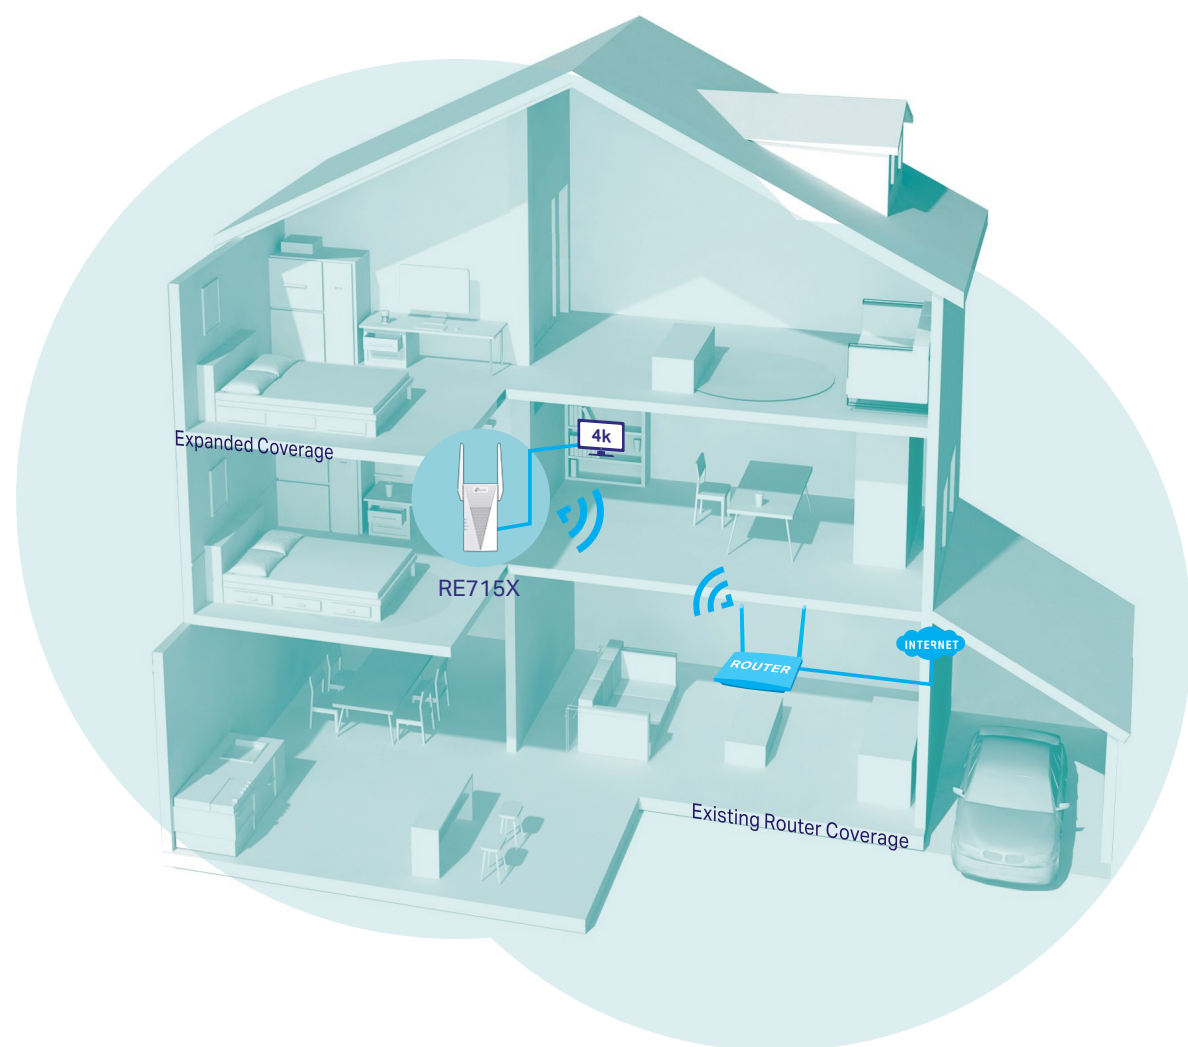

● Wi-Fi Coverage  
— Ethernet Cable



### Faster Wi-Fi 6 Speed

Experience explosive Wi-Fi speeds up to 3 Gbps with the wider 160 MHz channel.†



### Larger Capacity

Wi-Fi 6 builds a more efficient network that increases the average throughput by 4 times and servers more devices.△



### Ultra-Low Latency

Take advantage of ultra-low latency to enjoy smoother online experience.



### Save Clients' Battery Power

Target Wake Time schedules the connection time of battery-powered devices to reduce their power consumption.\*



### Adaptive Path Selection

Keep your network running at top-speed by automatically choosing the fastest connection path to the router.



### Access Point Mode

Create a new Wi-Fi access point to enhance your wired network with Wi-Fi capability.



### Easy Setup Within Minutes

Easy setup and management via WPS button/Tether app/Web UI.

# Highlights



RE715X is more than a traditional range extender. It creates a Mesh network by connecting to a OneMesh™ router for seamless whole-home coverage.



## Wi-Fi Dead-Zone Killer

Eliminate weak signal areas with Wi-Fi coverage for the whole house.



## Uninterrupted Roaming

Enjoy uninterrupted streaming, surfing, and more—even when moving around your home.



## One Wi-Fi Name

Stay connected to the same network name in every room.



## Easy Setup and Unified Management


Push the WPS button to set up a Mesh network you can manage from the Tether app or web UI.



Check more info about OneMesh technology and full list of OneMesh extenders/routers at: <https://www.tp-link.com/onemesh>

\*More compatible devices coming soon

# AX3000 Wi-Fi Range Extender

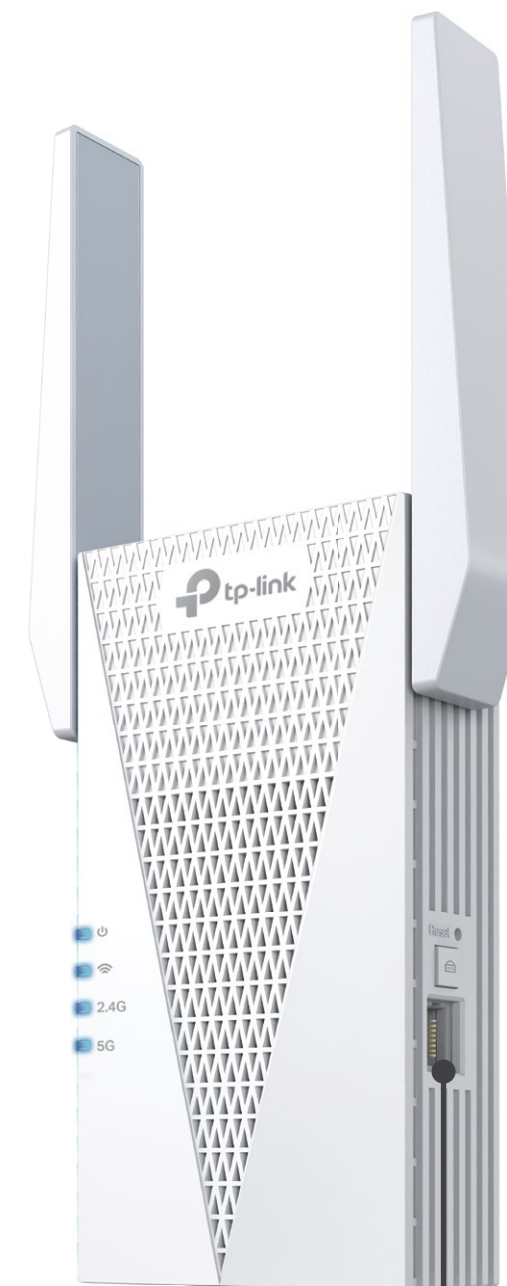

## Secure One-touch Connection (WPS)

Instantly connect the extender to a router without inference configuration.

## Smart Signal Indicator

See signal to find the best spot to extend Wi-Fi.

- Strong signal
- Weak signal

## Gigabit Ethernet Port

Plug in to give wired device network access, particularly ideal for high bandwidth consuming devices.



PC




Game Console



Smart TV

# Features

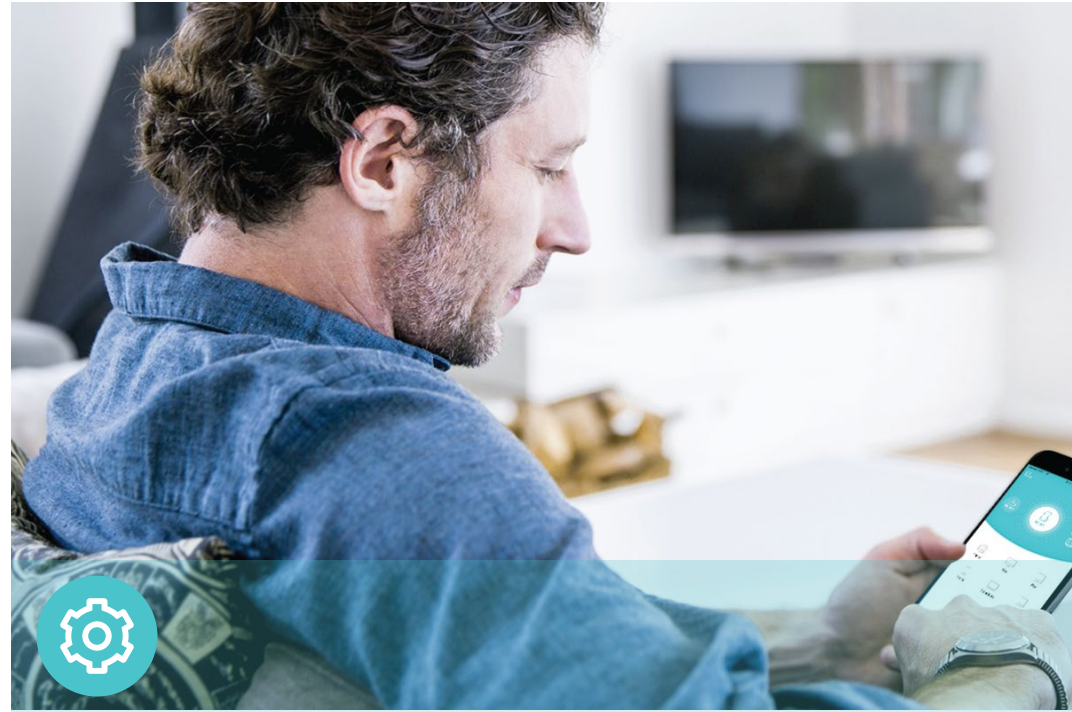

## Ease of Use

- Intuitive Web UI – Ensures quick and simple installation without hassle
- Fast Encryption – One-touch wireless security encryption with the WPS button
- Hassle-free Management with Tether App – Network management is made easy with the TP-Link Tether App, available on any Android or iOS device
- Online Upgrade – Keeps you informed of the latest firmware and allows online updating on the web UI



## Speed

- Ultimate Wireless Speed – Combined wireless speeds of up to 574 Mbps (over 2.4 GHz) and 2402 Mbps (over 5 GHz)<sup>†</sup>
- Support Wi-Fi 6 – Turbocharge your devices with wireless speeds of up to 3 Gbps
- Adaptive Path Selection – Keep your network running at top-speed by automatically choosing the fastest connection path to the router




## Reliability

- Simultaneous Dual Band – Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Reliable Connection – External antennas for optimal Wi-Fi coverage and reliable wireless connections
- Ultra-Low Latency – Take advantage of ultra-low latency to enjoy smoother online experience

# Specifications

## Hardware

- Button: WPS Button, Reset Button
- Port: 1 Gigabit Ethernet Port
- Antenna: 2 External Antennas
- Power Consumption: 14W
- Dimensions (W × D × H): 4.2×1.6×6.3 in. (107×40×160 mm)

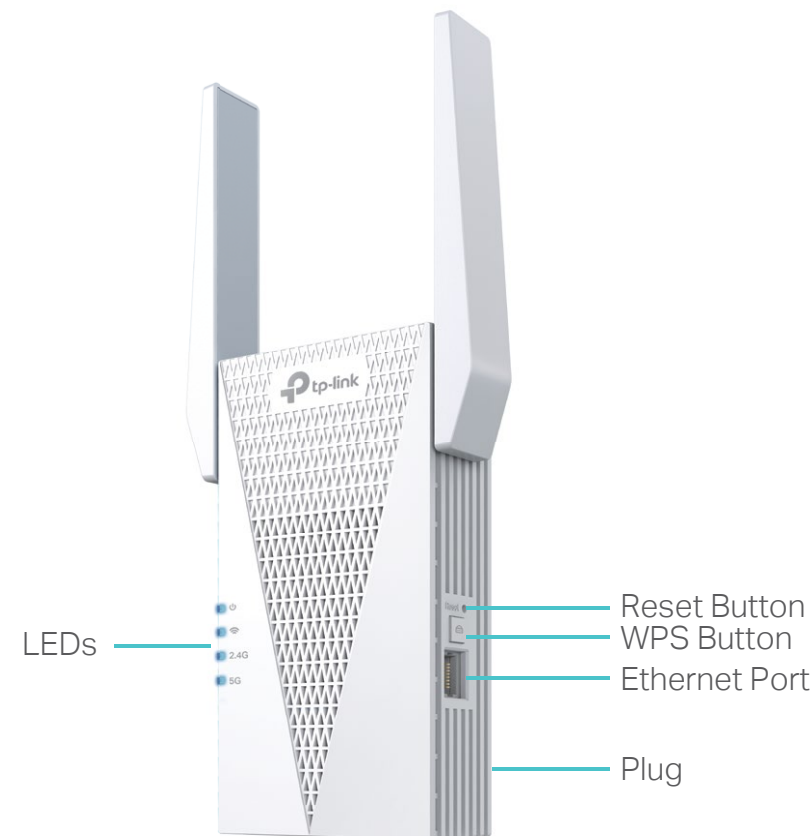

For more information, please visit

<https://www.tp-link.com/home-networking/range-extender/RE715X/>

or scan the QR code left

## Wireless

- Wireless Standards: IEEE 802.11a/n/ac/ax 5 GHz, IEEE 802.11b/g/n/ax 2.4 GHz
- Frequency: 2.4 GHz and 5 GHz
- Signal Rate: 574 Mbps at 2.4 GHz, 2402 Mbps at 5 GHz
- Transmit Power: FCC: 2.4GHz≤24dBm, 5GHz≤24dBm
- Reception Sensitivity:
  - 5GHz:
    - 11ax HE160 MCS11: -58dBm, 11ax HE160 MCS0: -88dBm
    - 11ax HE80 MCS11: -60dBm, 11ax HE80 MCS0: -91dBm
    - 11ax HE40 MCS11: -63dBm, 11ax HE40 MCS0: -94dBm
    - 11ax HE20 MCS11: -66dBm, 11ax HE20 MCS0: -97dBm
    - 11ac HT80 MCS9: -65dBm, 11ac HT80 MCS0: -91dBm
    - 11ac HT40 MCS9: -69dBm, 11ac HT40 MCS0: -94dBm
    - 11ac HT20 MCS8: -74dBm, 11ac HT20 MCS0: -97dBm
    - 11a 54Mbps: -78dBm, 11a 6Mbps: -97dBm
  - 2.4GHz:
    - 11ax HE40 MCS11: -62dBm, 11ax HE40 MCS0: -93dBm
    - 11ax HE20 MCS11: -65dBm, 11ax HE20 MCS0: -95dBm
    - 11n HT40 MCS7: -72dBm, 11n HT40 MCS0: -93dBm
    - 11n HT20 MCS7: -76dBm, 11n HT20 MCS0: -95dBm
    - 11g 54Mbps: -78dBm, 11g 6Mbps: -96dBm

- Wireless Function: Enable/Disable Wireless Radio, Wireless Statistics
- Wireless Security: WEP, WPA, WPA2, WPA3

## Others

- Certification  
FCC, RoHS
- System Requirements  
Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, 10, MAC OS, NetWare, UNIX or Linux  
Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser
- Package Contents  
Wi-Fi Range Extender RE715X  
Quick Installation Guide

<sup>†</sup>Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage per ft<sup>2</sup> are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

<sup>†</sup>The product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or is non-standard or outdated.

<sup>§</sup>Uninterrupted Roaming is designed for devices that support the 802.11k/v standard.

<sup>¶</sup>Up to 4x Capacity refers to 4x increase in median throughput under dense environment compared to 11ac wave 2 range extender.

<sup>\*</sup>Saving clients' battery power requires clients to also support the 802.11ax Wi-Fi standard. Actual power reduction may vary as a result of network conditions, client limitations, and environmental factors.

©2021 TP-Link

[www.tp-link.com](http://www.tp-link.com)

TP-Link AX3000 Wi-Fi 6 Range Extender RE715X